



P571G  
ANSI 57-1

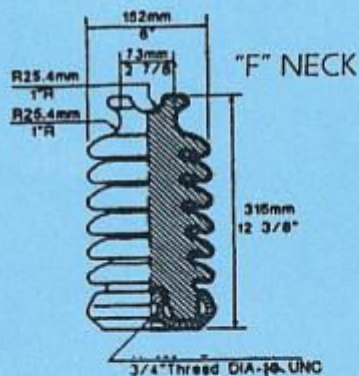

P572G  
ANSI 57-2

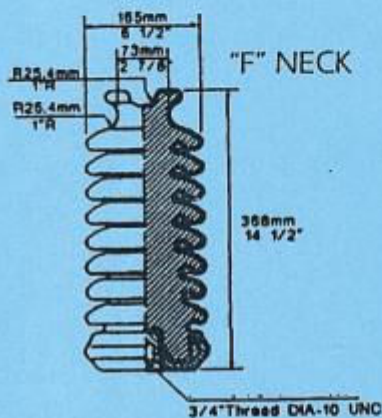

P573G  
ANSI 57-3

**Specification - ANSI C29.7**

Catalog Number	P571G	P572G	P573G
<b>Dimensions (in.)</b>			
Leakage Distance	14	22	29
Dry Arcing Distance	6-1/2	9-1/2	12-1/4
<b>Mechanical Values (lbs.)</b>			
Cantilever Strength *	2,800	2,800	2,800
<b>Electrical Values (kV)</b>			
Usual Line Voltage	25	35	45
Low Frequency Dry Flashover	80	110	125
Low Frequency Wet Flashover	60	85	100
Impulse Flashover, Positive	130	180	210
Impulse Flashover, Negative	155	205	260
<b>Radio Influence Voltage Data</b>			
Test Voltage, RMS to Ground (kV)	15	22	30
Maximum RIV at 1000 kHz (µV)	100	100	200
<b>Packing &amp; Shipping Data</b>			
Net Weight Each (lbs.)	14.3	19.1	26.3
Packed Weight Each (lbs.)	17.6	23.9	30.6
Standard Package Quantity	4	3	3

\* Maximum Recommended Working Load = 40% of Cantilever Rating

ANSI - 70 Gray Glaze is Standard.



**POWERLINE HARDWARE**

**JACKSONVILLE, FLORIDA  
FAX (904) 695-9717**