


# Copper Bonded Ground Rods

Ground Rods

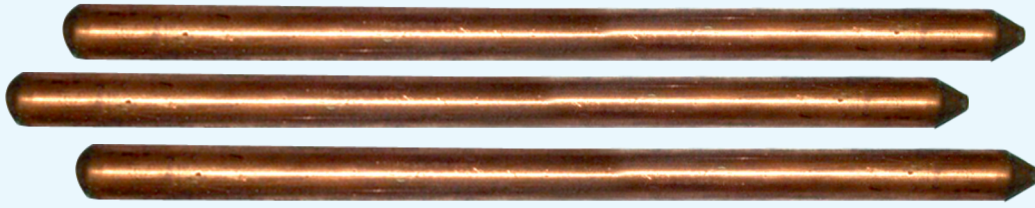

- Manufactured of high strength 1010-1020 cold drawn steel
- Average tensile strength of 80,000 psi and straightness tolerance of 0.010" per linear foot
- Resist corrosion better than galvanized rods allowing for a 30 Years service in most soils
- 10 MIL and 13 MIL Plating thickness available
- Our rods meet or exceeds UL requirements
- Custom Sizes Available Upon Request

Catalog #	Plating Thickness (MIL)	Rod Diameter x Length (inches x Ft)	Approx. Ship Wt. (lb Per 100 pcs)	Std. Pkg. Qty.
PLH-126C	10	1/2 x 6	310	10
PLH-128C	10	1/2 x 8	553	10
PLH-1210C	10	1/2 x 10	738	10
PLH-586C	10	5/8 x 6	520	10
PLH-588C	10	5/8 x 8	690	10
PLH-588C-13	13	5/8 x 8	690	10
PLH-5810C	10	5/8 x 10	865	10
PLH-5810C-13	13	5/8 x 10	865	10
PLH-348C	10	3/4 x 8	978	5
PLH-348C-13	13	3/4 x 8	978	5
PLH-3410C	10	3/4 x 10	1207	5

## Sectional Ground Rod

- For use when it is necessary to deep-drive rods.

Catalog #	Plating Thickness	Rod Diameter x Length (inches x Ft)	Approx. Ship Wt. (lb Per 100 pcs)	Std. Pkg. Qty.
PLH-588CS	10	5/8 x 8	690	10
PLH-5810CS	10	5/8 x 10	865	10
PLH-3410CS	10	3/4 x 10	1207	10

UL Listed & RUS ACCEPTED



**POWERLINE HARDWARE**

6841 Phillips Parkway Drive S, Jacksonville, Florida 32256  
Phone : 904-288-9880, Fax : 904-268-9717

E-mail : sales@powerlinehardware.com | Website : www.powerlinehardware.com

33